FORM-PTO-1390 U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE ATTORNEY'S DOCKET NUMBER (Rev. 12-29-99) TRANSMITTAL LETTER TO THE UNITED STATES 025219-317 U.S APPLICATION DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371 Unassigned INTERNATIONAL APPLICATION NO. INTERNATIONAL FILING DATE PRIORITY DATE CLAIMED PCT/FR99/02238 September 21, 1999 September 22, 1998 TITLE OF INVENTION MATERIAL WITH IMPROVED RESISTANCE TO THERMAL AGEING AND ITS METHOD OF PRODUCT APPLICANT(S) FOR DO/EO/US MAR 1 3 Patrick HOURQUEBIE; Didier MARSACQ; Philippe MAZABRAUD Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information This is a FIRST submission of items concerning a filing under 35 U.S.C. 371. This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371. This is an express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and the PCT Articles 22 and 39(1). 3. \boxtimes 4 A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date. 5. A copy of the International Application as filed (35 U.S.C. 371(c)(2)) is transmitted herewith (required only if not transmitted by the International Bureau). \boxtimes b. has been transmitted by the International Bureau. is not required, as the application was filed in the United States Receiving Office (RO/US) \boxtimes 6. A translation of the International Application into English (35 U.S.C. 371(c)(2)). 7 Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3)) are transmitted herewith (required only if not transmitted by the International Bureau). Ō have been transmitted by the International Bureau. have not been made; however, the time limit for making such amendments has NOT expired. have not been made and will not be made. A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)). An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)). A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)). Items 11. to 16. below concern other document(s) or information included: An Information Disclosure Statement under 37 CFR 1.97 and 1.98. An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included. 13. A FIRST preliminary amendment. A SECOND or SUBSEQUENT preliminary amendment. A substitute specification.

A change of power of attorney and/or address letter.

PCT Request, International Search Report and cited references

Other items or information:

 \boxtimes 16.

u.s. APPLICA Unassign	s. APPLICATION NO. (If 1009 set 377. F8 16019 85 INTERNATIONAL APPLICATION NO. PCT/FR99/02238					NEY'S DOCKET NUMBER		
17. 🛛	17. A The following fees are submitted:			CALCUL	ATIONS	PTO USE ONLY		
Basic Natio	nal Fee (37 C	FR 1.492(a)(1)-(5)):						
Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO								
Intern USPT	ational prelim O but Interna	inary examination fee (37 CF tional Search Report prepared	R 1.48	32) not paid to e EPO or JPO	\$860.00 (970)			
intern but in	ational prelim ternational se	inary examination fee (37 CF arch fee (37 CFR 1.445(a)(2)	R 1.48 } paid	32) not paid to USPTO to USPTO	\$710.00 (958)			
Interna but all	ational prelim I claims did ne	inary examination fee paid to ot satisfy provisions of PCT A	USPT Article	O (37 CFR 1.482) 33(1)-(4)	\$690.00 (956)			
Interna and al	ational prelim Il claims satist	inary examination fee paid to fied provisions of PCT Article	USPT 33(1)-	O (37 CFR 1.482) -(4)	\$100.00 (962)			
		ENTER	APP	ROPRIATE BASIC I	FEE AMOUNT =	\$	860.00	
		154) for furnishing the oath o claimed priority date (37 CFI			20 🗆 30 🗆	\$		
Cla	nims	Number Filed		Number Extra	Rate			
Total Claim	s	18 -20 =		00	X\$18.00 (966)	\$	0.00	
Independen	t Claims	2 -3 =		0	X\$80.00 (964)	\$	0.00	
	pendent claim	n(s) (if applicable)			+ \$270.00 (968)	\$	0.00	
Section 1			TO	TAL OF ABOVE CA	ALCULATIONS =	\$	860.00	!
Reduction f	or 1/2 for fili	ng by small entity, if applicab	le (see	e below).		\$		
The state of the s					SUBTOTAL =	\$;	860.00	
Processing	Processing fee of \$130.00 (156) for furnishing the English translation later than 20 30 \$ \$ months from the earliest claimed priority date (37 CFR 1.492(f)).							
TOTAL NATIONAL FEE =					ATIONAL FEE =	\$	860.00	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 (581) per property +					t be accompanied by	\$		
TOTAL FEES ENCLOSED =					\$	860.00		
					Amo	unt to be: refunded	\$	
3	charged \$					\$		
a. Small entity status is hereby claimed.								
b. A check in the amount of \$ 860.00 to cover the above fees is enclosed.								
c. Please charge my Deposit Account No. <u>02-4800</u> in the amount of \$ to cover the above fees. A duplicate copy of this sheet is enclosed.								
d. The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 02-4800. A duplicate copy of this sheet is enclosed.								
NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1,137(a) or (b)) must be filed and granted to restore the application to pending status.								
SEND ALL CORRESPONDENCE TO:								
Robert E. Krebs BURNS, DOANE, SWECKER & MATHIS, L.L.P. P.O. Box 1404								
		, Virginia 22313-1404		Rob NAM	ert E. Krebs IE			
				<u>25,</u> REGI	885 STRATION NUMBER			

Patent Attorney's Docket No. <u>025219-317</u>

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Patent Application of)
Hourquebie, et al.)) Group Art Unit: Unassigned
Application No.: Unassigned) Examiner: Unassigned
Filed: Herewith)
For: MATERIAL WITH IMPROVED)
RESISTANCE TO THERMAL AGE	•
AND ITS METHOD OF PRODUCT	ION)

PRELIMINARY AMENDMENT

Assistant Commissioner for Patents Washington, D.C. 20231

Sir:

Prior to examination, please amend the subject application as follows:

IN THE CLAIMS

Claim 3, line 13, please delete "or 2"

Claim 4, line 23, please delete "or 2"

Claim 5, line 2, please delete "or 2"

Claim 6, line 8, please delete "or 2"

Claim 9, line 28, please delete "such as defined in claim 1"

Claim 18, line 27, please delete "or 17"

PLEASE ADD THE FOLLOWING CLAIMS:

- 19. Material having improved resistance to thermal ageing according to claim 2, characterized in that the insulating polymer is chosen from among the thermoplastic resins such as acrylic, styrene, vinyl or cellulose resins, or from among polyolefins, fluorine-containing polymers, polyethers, polyimides, polycarbonates, polyurethanes, silicones, their copolymers or mixtures between homopolymers and copolymers.
- 20. Material having improved resistance to thermal ageing according to claim 2, characterized in that the insulating polymer is chosen from among polyethylene, low density polyethylene, high density polyethylene, linear low density polyethylene, polypropylene, ethylene-propylene-diene monomer, fluorine-containing polyvinylidene, ethylene butacrylate or the copolymers of ethylene and vinyl acetate, either alone or in a mixture.
- 21. Material having improved resistance to thermal ageing according to claim 2, characterized in that the insulating polymer is chosen from among the thermosetting resins, such as polyesters, epoxy resins or phenol resins.
- 22. Material having improved resistance to thermal ageing according to claim 2, characterized in that the conducting polymer has a conductivity of at least approximately $10^{-9} \mathrm{S.cm^{-1}}$.

23. Use of the insulating material having improved thermal resistance obtained with the method according to any of claim 17, for the manufacture of high and/or very high voltage cables.

REMARKS

The claims of the subject application have been amended to avoid multiple dependency. Favorable consideration of the subject application is respectfully requested.

Respectfully submitted,

BURNS, DOANE, SWECKER & MATHIS, L.L.P.

Robert E. Krebs

Registration No. 25,885

Post Office Box 1404 Alexandria, Virginia 22313-1404 (650) 622-2300

Date: March 12, 2001

JC13 Rec'd PCT/PTO 0 3 APR 2001

I HEREBY CERTIFY THAT THIS CORRESPONDENCE IS BEING DEPOSITED WITH THE UNITED STATES POSTAL SERVICE WITH SUFFICIENT POSTAGE AS FIRST CLASS MAIL IN AN ENVELOPE ADDRESSED TO: ASSISTANT COMMISSIONER FOR PATENTS, WASHINGTON, D.C., 20231, ON:

APR 0 3 2001 By: Hang shang

Patent Attorney's Docket No. <u>025219-317</u>

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Patent Application of)	
Hourquebie, et al.)	Group Art Unit: Unassigned
Application No.: 09/786,985)	Examiner: Unassigned
Filed: March 13, 2001)	
For: MATERIAL WITH IMPROVED RESISTANCE TO THERMAL AGEIN AND ITS METHOD OF PRODUCTION	,	

PRELIMINARY AMENDMENT

Assistant Commissioner for Patents Washington, D.C. 20231

Sir:

Prior to examination, please amend the subject application as follows:

IN THE SPECIFICATION

Please amend the specification by inserting before the first line the sentence:
"This application is a national phase of PCT/FR99/02238 which was filed on September
21, 1999 and was not published in English."



REMARKS

Entry of the foregoing amendment to the Specification is requested to comply with the requirements of 37 C.F.R. 1.78(a)(2).

If the Examiner should be of the opinion that a telephone conference would be helpful in resolving any outstanding issues, the Examiner is urged to contact the undersigned.

Respectfully submitted,

BURNS, DOANE, SWECKER & MATHIS, L.L.P.

y: —*——*

Robert E. Krebs Registration No. 25,885

Post Office Box 1404 Alexandria, Virginia 22313-1404

(650) 622-2300

Date: March 29, 2001



Patent Attorney's Docket No. <u>025219-317</u>

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Patent Application of)	
Hourquebie, et al.)	Group Art Unit: Unassigned
Application No.: 09/786,985)	Examiner: Unassigned
Filed: March 13, 2001)	
For: MATERIAL WITH IMPROVED RESISTANCE TO THERMAL AGEIN AND ITS METHOD OF PRODUCTION		

PRELIMINARY AMENDMENT

Assistant Commissioner for Patents Washington, D.C. 20231

Sir:

Prior to examination, please amend the subject application as follows:

IN THE SPECIFICATION

Please amend the specification by inserting before the first line the sentence:
"This application is a national phase of PCT/FR99/02238 which was filed on September
21, 1999 and was published by the International Bureau in English on March 30, 2000."

REMARKS

Entry of the foregoing amendment to the Specification is requested to comply with the requirements of 37 C.F.R. 1.78(a)(2).

If the Examiner should be of the opinion that a telephone conference would be helpful in resolving any outstanding issues, the Examiner is urged to contact the undersigned.

Respectfully submitted,

BURNS, DOANE, SWECKER & MATHIS, L.L.P.

Robert E. Krebs

Registration No. 25,885

Post Office Box 1404 Alexandria, Virginia 22313-1404 (650) 622-2300

Date: March 28, 2001

MATERIAL WITH IMPROVED RESISTANCE TO THERMAL AGEING AND ITS METHOD OF PRODUCTION

DESCRIPTION

Technical field

The present invention relates to a material with improved resistance to thermal ageing, to a method for producing this material, and to the use of this material in the manufacture of high and very high voltage cables.

The material according to the invention is an insulating material which has improved characteristics of resistance to thermal ageing, in particular resistance to thermal ageing by oxidation.

This material with improved characteristics of thermal ageing may be used in any device requiring electric insulation, and in particular for very high voltage cables, even at high temperatures.

15 Prior art

25

The materials used to produce electric insulation cables or devices often contain insulating organic polymers such as polyolefins.

The production of materials having improved 20 resistance to thermal ageing, in particular to thermal ageing by oxidation, involves the addition of antioxidants.

Generally, the antioxidants used to stabilize polyolefins are molecules of fairly low molecular weight which tend to migrate towards the outside of the polymer.

20

The materials so produced do not resist well to ageing, in particular to thermal ageing by oxidation.

Description of the invention

The purpose of the present invention is precisely to provide a material having very high thermal stability over time, in particular against oxidation.

The material of the invention is a material with improved resistance to thermal ageing containing a conducting polymer, preferably 10 to 5000 ppm of conducting polymer, dispersed in an insulating polymer and whose heterogeneity size is 0.1 μ m or less as observed under electron microscopy.

The materials of the invention contain very low levels of conducting polymer, also called conjugate polymer hereinafter, typically from 10 to 5000 ppm, in the doped or undoped state.

Advantageously, the insulating polymer may be chosen from among the thermoplastic resins such as the acrylic, styrene, vinyl or cellulose resins or from among the polyolefins, fluorine-containing polymers, polyethers, polyimides, polycarbonates, polyurethanes, silicones, their copolymers or mixtures between homopolymers and copolymers.

For example, the insulating polymer may be chosen from among polyethylene, low density polyethylene, high density polyethylene, linear low density polyethylene, polypropylene, ethylene-propylene-diene monomer, fluorine-containing polyvinylidene, ethylene butacrylate or copolymers of ethylene and vinyl acetate, either alone or in a mixture.

English translation of the amended sheets of International Preliminary Examination Report 2a

Document US-A-5 254 633 describes a method for producing conducting or non-conducting films or coatings of polyaniline on a substrate and items formed using said method. It sets forth that particle size is not critical and may vary widely for example from 10^{-9} to 10^{-3} cm³.

15

20

The insulating polymer may also be a thermosetting polymer chosen from among the polyesters, epoxy resins or phenol resins.

Advantageously, the conducting polymer melting or softening point compatible with its use with the chosen insulating polymer. In addition, the purity of this conducting polymer must be maximum otherwise impurities may affect the voltage resistance characteristics obtained with the materials of the invention. It must be soluble in organic solvents in its doped state (oxidized) or preferably in its undoped state (reduced).

According to the invention, the conducting polymer may be a charge of organic type having a π system of electrons, relocated on at least 7 atoms, on the main chain of the polymer or the branches thereof. conducting polymer may either be a simple conducting polymer, or a conducting polymer grafted onto insulating polymer, or a copolymer containing one or more conjugate systems, or any organic molecule sufficiently relocated or having sufficient conductivity of at least approximately 10-9S.cm⁻¹.

Such molecules may, for example, be polypeptides or vitamin A. In respect of polymers, these are advantageously chosen in the group comprising polythiophene, polyalkylthiophenes, polyaniline, polypyrrole, polyacetylene, polyparaphenylene, their derivatives or their mixtures.

The materials of the invention are obtained by a homogeneous mixture of a conjugate polymer and a polyolefin leading to homogeneity on a scale of less than 0.1 μm . Producing such materials by direct mixing of powders or granules does not lead to obtaining an

10

25

English translation of the amended sheets of International Preliminary Examination Report

improvement in the ageing properties with conjugate polymer levels in the order of 1000 ppm.

Therefore the invention also provides a method for producing materials having improved resistance to ageing, in particular to thermal ageing by oxidation, characterized in that it comprises the steps consisting of:

- dissolving at least one conducting polymer in an organic solvent, so as to form an impregnating solution,
- impregnating granules formed of an insulating polymer or of a mixture of insulating polymers with said impregnating solution,
- evaporating the solvent so as to obtain granules of insulating polymer coated with a conducting polymer,
 - drying said granules,
 - extruding or hot mixing said granules to form a homogeneous mixture.

With the method of the invention it is possible to 20 disperse the conjugate polymer in the insulating polymer on almost molecular scale.

Producing the mixtures includes a first impregnation phase of the insulating polymer granules with a solution containing the conjugate polymer. The use of this method leads to obtaining a very good mixture having the required homogeneity, but in no way amounts to a limitation of the invention. Any other method with which it is possible to obtain homogeneous mixtures on a scale of less than 0.1 micron will be suitable.

After evaporating the solvent, the granules of insulating polymer are coated with the organic charge. The granules are then dried in a drying oven and

30

English translation of the amended sheets of International Preliminary Examination Report

extruded. The strip obtained is granulated. The granules obtained may be formed by any conventional technique used for insulating polymers such as casting,

The structural characteristics of the conjugate polymer such as its conjugation length, average molecular weight, percentage defect in the production line, even at very low levels, have an effect on the thermal stabilisation obtained with the materials of the invention. These characteristics may be controlled by the conditions of synthesis of the conjugate polymer.

rolling, injection, extrusion.

According to the method of the invention, the conducting polymer may represent from 10 to 5000 ppm of the insulating polymer.

According to the invention, the insulating polymer and/or the conducting polymer may be the one or those previously cited.

The material of the invention shows very good 20 resistance to thermal ageing, in particular to oxidation, as shown by the illustrative examples below which are non-restrictive, and in the graphs of appended figures 1 and 2.

This material, obtained for example by the above-25 cited method, may be used in the manufacture of high and/or very high voltage cables.

More precisely, it is possible to replace chemically cross-linkable polyethylene (CCP), currently used in very high voltage cables, by the material obtained with the method of the invention.

Description of the figures

Figure 1 is a graph showing the change in absorbency at 1715 cm^{-1} (acids and ketones) in relation to thermal oxidation time for a virgin polyethylene and for the same polyethylene stabilized as described in example 1 (PBT FeCl₃) and in example 2 (PBT Magnesium) below.

Figure 2 is a graph showing the change in absorbency at 1715 cm⁻¹ (acids and ketones) in relation to thermal oxidation time for a virgin polyethylene and for a stabilised polyethylene as described in example 3 below.

Example 1

10

25

Poly(octyl-3 thiophene) (POT) was synthesized by oxidation with ferric chloride in chloroform following the method described by R. SUGIMOTO, S. TAKEDA, H.B. GU, K. YOSHINO, in Chemistry Express, vol. 1, n° 11, pp. 635-638 (1986). The following chemical equation (I) summarizes this synthesis:

$$\begin{array}{c}
\text{(CH}_2)_7\text{CH}_3\\
& \\
\text{S} & \\
& \\
\text{CHCl}_3
\end{array}$$

$$\begin{array}{c}
\text{(CH}_2)_7\text{CH}_3\\
& \\
\text{S} & \\
\text{n}
\end{array}$$
(I)

The parameters affecting thermal stabilization properties here are the oxidiser over monomer ratio, the solvent and polymerization temperature.

400 mg of the above-cited polymer are dissolved in 200 ml of tetrahydrofurane (THF) so as to obtain the impregnating solution. 200 g of low density polyethylene granules are then added. The solvent is

20

25

evaporated at 50°C using a rotary evaporator. A film of conjugate polymer is then deposited on the granules. These granules are dried in a vacuum, at ambient temperature for 24 h. The granules are then extruded. A strip of mixture is obtained using a flat die with a width of 50 mm.

The material is in the form of a clear, brick-red strip containing 2000 ppm POT.

Analysis under scanning electron microscope does $10 \quad \text{not detect any heterogeneity on the scale of 0.1 } \mu\text{m in}$ the material produced in this example.

By way of comparison, the same material made by directly mixing the powder of conducting polymer and the powder of insulating polymer before extrusion, leads to a material whose heterogeneity size is in the order of 0.2 micron.

Measurements of oxidation rate during ageing at 80°C of the material produced in this example were taken at the same time as measurements of oxidation rate during ageing of a virgin polyethylene at 80°C. Ageing was conducted in an oven.

Figure 1 is graph plotted а using measurements showing the change in absorbency at 1715 cm⁻¹ (acids and ketones) in relation to the time of thermal oxidation in hours for a virgin polyethylene (graph referenced 1) and the same polyethylene stabilized as described in this example 1 (graph referenced 3).

It will be noted from these results, in comparison with the virgin polyethylene, that there is a reduction in oxidation rate during ageing at 80°C for the material of the invention. It is therefore shown that

with the presence of the conjugate polymer it is possible to stabilize the material.

Example 2

Poly(butyl-3 thiophene) (PBT) was synthesized using the general method described by O.INGANAS, W.R. SALANEK, J.E. ÖSTERHOLM, J. LAAKSO in Synthetic Metals, 22, pp. 395-406 (1988) replacing iodine by bromine. The following chemical equation (II) summarizes this synthesis:

Control over synthesis conditions can achieve variation in the characteristics of the material and the final properties of the mixture. For example, molecular weight is dependent upon synthesis conditions and modifies the solubility properties of the conjugate polymer in the matrix in which it is inserted.

The polymer obtained is extruded as in example 1.

A clear, orange-coloured strip is obtained containing
20 2000 ppm of PBT.

Analysis under scanning electronic microscope does not reveal any heterogeneity on the scale of 0.1 μm in the material produced in this example.

Measurements were made of the oxidation rate during ageing at 80°C of the material produced in this example. The results of these measurements were used to plot graph 5 in figure 1 previously cited.

From these results it is noted that, in comparison with the virgin polyethylene, there is a reduction in

oxidation rate in relation to time during the ageing at 80°C of the material of the invention. It is therefore demonstrated that with the presence of the conjugate polymer it is possible to stabilize the material. This stabilisation is of the same order as that obtained with the polymer of example one (graph denoted 3 in figure 1).

Examples 1 and 2 therefore show that conjugate polymers derived from thiophene according to the present invention can considerably delay oxidation of the polyethylene. The non-stabilized material starts to deteriorate after 1000 oven hours at 80°C, whereas after 6000 hours the materials of the invention are still not deteriorated at this same temperature.

15

20

30

10

5

Example 3

A mixture containing polyaniline (Pani) and low density polyethylene is made. Polyaniline powder doped with dodecylbenzenesulfonic acid is used, whose production is described for example by Y. CAO, P. SMITH, A.J. HEEGER in Synthetic Metals, 48, pp. 91-97 (1992). This powder is placed in solution in xylene. This solution is used to impregnate the granules following the method of the invention, as in example 1.

The granules obtained are extruded as in example 1. A clear, green strip is obtained containing 500 ppm of Pani.

Analysis under a scanning electron microscope does not detect any heterogeneity on the scale of 0.1 μm in the material produced in this example.

Measurements were made of the change in absorbency at $1715~\text{cm}^{-1}$ (acids and ketones) in relation to the time of thermal oxidation in hours (T=90°C, thickness

 $500 \ \mu m)$ for a virgin polyethylene and a polyethylene stabilised as in this example 3. Appended figure 2 is a graph plotted using these measurements.

The stabilisation of the properties obtained is also of great importance, for harsher ageing, since oxidation of the material of the present invention (graph denoted 7) only occurs on and after 600 hours' ageing at 90°C, whereas oxidation of the virgin polyethylene starts at 50 hours (graph referenced 9).

10

15

20

5

Example 4: Manufacture of a high voltage cable

The cable manufactured comprises a conductor core successively coated with an inner semiconductor shield, a material of the invention such as in examples 1 to 3, an outer semiconductor shield and a protective sheath. This cable offers better resistance to ageing by thermal oxidation, even at temperatures of 90°C.

The use of a conjugate polymer in homogeneous mixtures on a scale of 0.1 μm or less, which is the subject of the present invention, provides a solution which, in unexpected manner, leads to increasing performance as regards the lifetime of the material subjected to thermal stress.

English translation of the amended sheets of International Preliminary Examination Report

CLAIMS

- 1. Method for producing insulating materials having improved resistance to thermal ageing, characterized in that it comprises the steps consisting of:
- 5 dissolving at least one conducting polymer having maximum purity in an organic solvent, so as to form an impregnating solution,
 - impregnating granules, formed of an insulating polymer or of a mixture of insulating polymers, with said impregnating solution,
 - evaporating the solvent so as to obtain granules of insulating polymer coated with a conducting polymer,
 - drying said granules,
- extruding or hot mixing said granules to form a
 homogeneous mixture.

in which the conducting polymer represents 10 to 5000 ppm of insulating polymer.

- 2. Production method according to claim 1, 20 characterized in that the impregnation of the granules is made by dipping the latter in the impregnating solution.
- claim Production method according to characterized in that the insulating polymer is chosen 25 from among the thermoplastic resins such the acrylic, styrene, vinyl or cellulose resins, or from fluorine-containing polyolefins, polyethers, polyimides, polycarbonates, polyurethanes, their copolymers mixtures between or silicons, 30 homopolymers and copolymers.

English translation of the amended sheets of International Preliminary Examination Report

4. Production method according to claim 1, characterized in that the insulating polymer is chosen from among polyethylene, low density polyethylene, high density polyethylene, linear low density polyethylene, polypropylene, ethylene-propylenediene monomer, fluorine-containing polyvinylidene, ethylene butacrylate or the copolymers of ethylene and vinyl acetate, either alone or in a mixture.

10

5

5. Production method according to claim 1, characterized in that the insulating polymer is chosen from among the thermosetting resins such as polyesters, epoxy resins or phenol resins.

15

- 6. Production method according to claim 1, characterized in that the conducting polymer has a conductivity of at least approximately 10^{-9} S.cm⁻¹.
- 7. Production method according to claim 6, characterized in that the conducting polymer is a simple conducting polymer, a conducting polymer grafted onto an insulating polymer, or a copolymer containing at least one conjugate system.

25

30

- 8. Production method according to claim 6, characterized in that the conducting polymer is chosen from among polythiophene, the polyalkylthiophenes, polyaniline, polypyrrole, polyacetylene, polyparaphenylene, their derivatives or their mixtures.
- 9. Material obtained with the method according to any of claims 1 to 8.

. . .

English translation of the amended sheets of International Preliminary Examination Report

10. Use of the insulating material having improved thermal resistance obtained with the method according to any of claims 1 to 8, for the manufacture of high and/or very high voltage cables.

ABSTRACT OF THE DISCLOSURE

MATERIAL WITH IMPROVED RESISTANCE TO THERMAL AGEING AND ITS METHOD OF PRODUCTION


The present invention relates to a material having improved resistance to thermal ageing, to a method for producing this material, and to the use of this material for the manufacture of high and very high voltage cables.


The material having improved resistance to thermal ageing contains a conducting polymer dispersed in an insulating polymer and whose heterogeneity size is 0.1 μm or less as observed under scanning electron microscopy.

The method of the invention with which it is possible to obtain this homogeneity comprises the steps consisting of:

- dissolving a conducting polymer in an organic solvent, to form an impregnating solution,
 - impregnating granules formed of an insulating polymer, or of a mixture of insulating polymers, with said impregnating solution.



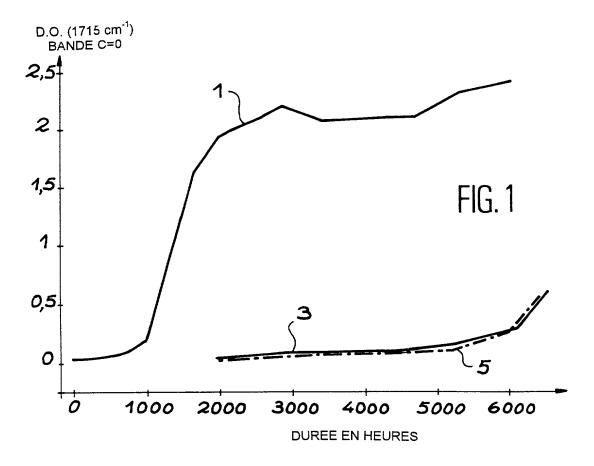

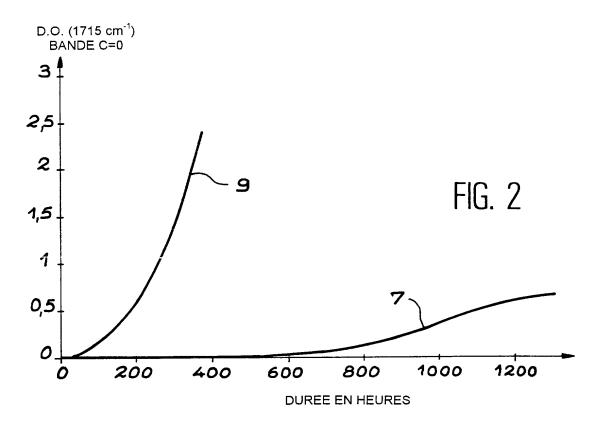

Declaration, Power Of Attorney and Petition

Page 1 of 3

WE (I) the undersigned inventor(s), hereby declare(s) that :

My residence, post office address and citizenship are as stated below next to my name,

We (I) believe that we are (I am) the original, first, and joint (sole) inventor(s) of the subject matter which is claimed and for which a patent is sought on the invention entitled

MATERIAL WITH IMPROVED RESISTANCE TO THERMAL AGEING AND ITS METHOD OF PRODUCTION

tne specification of v	WIIICH
1985 1985	is attached hereto.
10 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	X was filed on March 13, 2001
Same and a second	as Application Serial No. 09/786,985
Stormann	and amended on
100 100 100 100 100	was filed as PCT international application
Schedung. 2	Number PCT/FR99/02238
Tacaf : 0 	on September 21, 1999
S CONTROL OF CONTROL O	and was amended under PCT Article 19
The company of the co	on september 25, 2000 and November 29, 2000

- We (I) hereby state that we (I) have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.
- We (I) acknowledge the duty to disclose information known to be material to the patentability of this application as defined in Section 1.56 of Title 37 Code of Federal Regulations.
- We (I) hereby claim foreign priority benefits under 35 U.S.C. § 119 (a)-(d) or § 365 (b) of any foreign application(s) for patent or inventor's certificate, or § 365 (a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed. Prior Foreign Application (s)

Application No.	Country	Day/month/Year	Claimed
98 11786	FRANCE	22 SEPTEMBER 1998	YES □ NC □ YES □ NC
			YES NO

(Apj	plication Number)	—————(Fili	ing Date)
(Ap)	plication Number)		ing Date)
` .	•	`	-
International application designation this application is not disclosed in paragraph of 35 U.S.C. § 112, I at 37 CFR § 1.56 which became avail date of this application.	ng the United States, list the prior United States cknowledge the duty to lable between the filing	or PCT International applic disclose information which date of prior application ar	application(s), or § 365(c) of any line subject matter of each of the claim cation in the manner provided by the is material to patentability as defined the national or PCT International file. Status (pending, patented,
Application Serial No		Filing Date	abandoned)
Registration Number 26,003; Al 26,999; Samuel C. Miller III, Re Hovanec, Jr. Registration Number 28,510; R. Danny Hunt James W. Peterson, Registration Registration Number 25,885; Will 25,423; Patrick C. Keane, Registration Number 25,952; Per 29,195; Matthew L. Schneider, R Swiss, Registration Number 30,1 Number 33,096; Bruce T. Wieder Jillions, Registration Number 31, Number 36,086; Steven M. Du B Kenneth B. Leffler, Registration I with full powers of substitution and	an E. Kopecki, Regist gistration Number-27, r. 28,223; James A. Lalington, Registration No Number 26,057; Terestiam C. Rowland, Registation Number 32,858; Eter K. Skiff, Registration Station Number 32, 13; Michael J. Ure, Registration Number 1979; Harold R. Brownois, Registration Number 1979; Harold R. Brownois R. Br	tration Number 25,813; Registration Number G. Mukai, Registration Number umber 27,903; Eric H. Wessa Stanek REA, Registration tration Number 30,888; T. Gruce J. Boggs, Jr. Registration Number 31,917; Richa 814; Michael G. Savage, Registration Number 33,089; 33,815; Todd R. Walters, In III, Registration Number er 35,023; Brian P. O'Shaugad W. Hathaway, Registration tute this application and to treat the same control of the	er 24,970; Frederick G. Michaud Jregis E. Slutter, Registration Number 28,531; George A 28,632; E. Joseph Gess, Registration Sisblatt, Registration Number 30,505 on Number 30,427; Robert E. Krebs Gene Dillahunty, Registration Number ion Number 32,344; William H. Benzrd J. McGrath, Registration Number 32,596; Gerald F. Charles F. Wieland III, Registration Registration Number 34,040; Ronni S 36,341; Allen R. Baum, Registration phnessy, Registration Number 32,747 on Number-32,236 our (my) attorneys ansact all business in the Patent Officithis application be sent to the firm of
BURNS, DOANE, SWECKER &	MATHIS LLP, whose	post Office Address is: 1	737 King Street #400, Alexandria
Virginia 22314-2727. We (I) declare that all statem information and belief are believe false statements and the like so m	ents made herein of ou d to be true; and furthen hade are punishable by	or (my) own knowledge are or that these statements were fine or imprisonment, or be	e true and that all statements made of made with the knowledge that willfuncth, under Section 1001 of Title 18 callidity of the application or any pater
HOURQUEBIE Patrick		Residence :	9, les Pagnolias
NAME OF FIRST SOLE II	NVENTOR		FRANCE + 10
torre	•		FRANCE
Signature of Inventor		Citizen of:	/ Direct

Date

MARSAÇQ Didier.	Residence: 9 Rue ADRIEN RICARD
NAME OF SECOND INVENTOR Signature of Inventor L 15 and 2001 Date	28 000 GRENOBLE FRANCE Citizen of: FRANCE Post Office Address: The same as residence
MAZABRAUD Philippe NAME OF THIRD INVENTOR	Residence: <u>27 bld Alexandre HARTI</u> N <u>ASOOC ORCEANS</u> FRANCE
Signature of Inventor /e 02 mai 2001 Date	Citizen of: FRANCE Post Office Address: The same as residence
NAME OF FOURTH INVENTOR	Residence:
Signature of Inventor	Citizen of : Post Office Address : The same as residence
Date	
NAME OF FIFTH INVENTOR	Residence:
Signature of Inventor	Citizen of : Post Office Address : The same as residence

Date